



MIRADA INFRARED HEATED MIRROR

ELEGANT WARMTH FOR YOUR BATHROOM OR BEDROOM

- Frameless design - includes frame-surround light kit with dimmer switch to set the lighting to any mood
- Sturdy wall mount hold with optional ceiling mount
- Highly efficient "Entire Surface Heat Conductor (ESHC+)" technology - built-in heat conductors to 122° F max surface temperature - heat radiates from 85% of surface area
- Two integrated thermal safety switches
- .5" insulation reduces background temperature and improves thermal infrared radiation emitted from the front




MIRADA HEATED MIRROR

DESCRIPTION	PART #	POWER (W) (MIRROR)	POWER (W) (LIGHT)	LUMINOUS FLUX (LIGHT)	CURRENT (A)	SIZE (IN)	WEIGHT (LBS)	SUITABLE FOR ROOM SIZE (SQ. FT.)
36" Mirror with Light Kit	HK0480*	480	66	5.15	4.17	36 x 24 x .1	30	70 - 105
48" Mirror with Light Kit	HK0640*	640	80	6.15	5.56	48 x 24 x .1	38	97 - 143
60" Mirror with Light Kit	HK0760*	760	93	7.2	6.6	60 x 24 x .1	48.5	118 -172

* Part numbers includes mirror, light kit, thermostat and receiver, and connection set described below.

LIGHT KIT

The 1" wide light frame adds pleasant warmth and white, dimmable illumination to the coziness of the infrared heater – without any extra power cables. Efficient LED strips inside the light kit direct their light evenly downwards through a warm white (3000K), translucent scattered light insert (12-48V). The light frame itself is made of anodised aluminium.

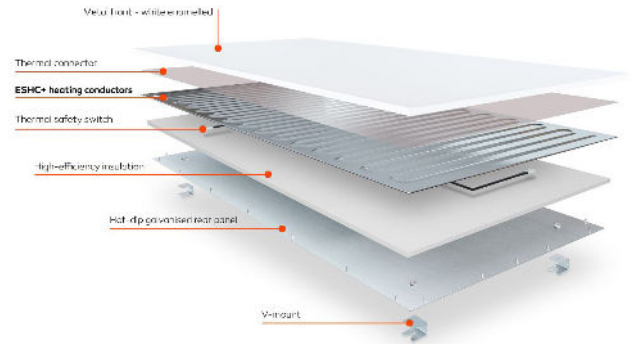

THERMOSTAT AND RECEIVER

The thermostat, which is powered by an efficient 10-year lithium battery, along with the wireless receiver, continuously monitor the room temperature and regulate all infrared heaters located in the room at the same time, depending on the programmed settings. A convenient control wheel allows the user to switch between ‘frost protection, night, day and automatic’ modes.

CONNECTION SET

The 115V connection set includes the transformer, dimmer and switch for light control. Included in the light kit.

REPLACEMENT PARTS

Part #	Description
HM0480	36" Mirror
HM0640	48" Mirror
HM0760	60" Mirror
LK0480	36" Light Kit
LK0640	48" Light Kit
LK0760	60" Light Kit
RT0000	115V Radio Thermostat
MR0010	Receiver
CK0400	115V Connection set for LED Lightframe (includes transformer, dimmer, switch)
TF0400	Transformer
DM0400	Dimmer
RS0400	Switch
LI00060	Power Cable
14171	Glass Holder for Ceiling Mount (2)

CHARACTERISTICS

- Slim design (.86" thick) - distance from wall 1.2"
- Minimal wall clearance, approx 2"
- High-quality single pane toughened safety glass with Heat Soak Test (TSG-H)
- Rounded glass edges and corners (radius .2")
- Rear panel: .6" galvanized metal housing, powder-coated white
- Integrated thermal safety switches
- Highly-efficient rear insulation
- Built-in stainless steel heating element

TECHNICAL DATA

FRONT:	5 mm TSG-H toughened safety glass
POWER SUPPLY:	115 V
FREQUENCY:	50/60 Hz
IP RATING:	IP X4
PROTECTION CLASS:	I
HEATING TECHNOLOGY:	ESHG+
CONNECTION CABLE:	76" white
CERTIFICATION:	CE
WARRANTY:	1 year

 **WARNING:** This product can expose you to chemicals including epichlorohydrin which is known to the State of California to cause cancer and birth defects and/or other reproductive harm. For information go to www.p65warnings.ca.gov