




The Mobile Home Revolution Continues!

Revolv® RE9 Series Electric Furnaces

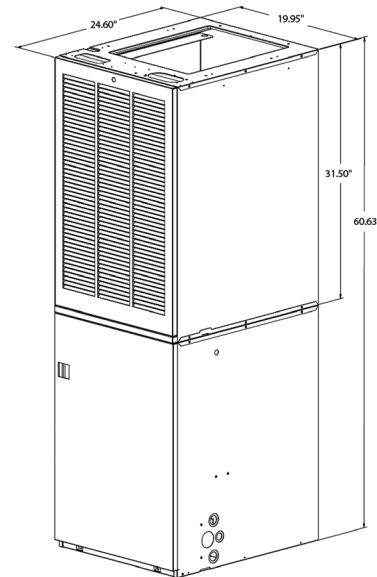

A/C and H/P Ready: For up through 4.0 tons.

Available in: Downflow and Upflow configurations.

Built in Full Sized Coil Cabinet: No need to add parts.

Built in Circuit Breakers: For safety & dependability.

Nichrome Heating Elements: For long lasting efficient heat.



Warranty

2 Years Parts / 1 Year Labor

Visit www.stylecrestinc.com
for warranty registration



Revolv® RE9 Series Electric Furnaces

Today's changing government standards are making it more difficult than ever to find the right matching equipment for Manufactured homes...

We have the answers!

Revolv® RE9 Series Electric Furnace						
Furnace Information	RE9D/U10C4	RE9D/U12C4	RE9D/U15C4	RE9D/U17C4	RE9D/U20C4	RE9D/U23C4
Heating Output (BTUH)*	35,000	41,000	53,000	57,000	57,000	75,000
Total kW (Heating Elements and Blower)	10.4	12.0	15.4	16.6	20.4	22.0
Supply Voltage	240 Volts / 60 Hz / 1-Phase					
Heating Elements, No. (Total kW)	2 (10)	2 (11.6)	3 (15.0)	3 (16.2)	4 (20.0)	4 (21.6)
Blower Wheel Size	10.5" Diameter / 8" Wide					
Motor Speeds, HP Amps	4 Speed, 1/3 HP, 2.9 Amps					
Test ESP (in. w. c.) Max	.3					
Nominal Tonnage Air Volume Range with Factory Installed Blower	2.0 - 4.0 Tons					
Air Filter (Upflow Models)	16" x 20" x 1"					
Air Filter (Downflow Models)	18" x 30" x 1" (Front)			16" x 20" x 1" (Top)		
Furnace Dimensions	20" W x 60.63" H x 24.5" D					
* Heating output rated a listed voltage. For outputs at voltages other than 240V, multiply the Btuh rating by the following factors: x 0.92 (230V), x 0.84 (220V), x 0.75 (208V)						

Revolv® RE9 Series Electrical Specifications				
Model Number	Supply Circuit	Total Amperes	MCA	MOCP
RE9D/U10C4	Single	44.6	56	60
RE9D/U12C4	Single	51.2	64	70
	Dual "A"	27.1	34	40
	Dual "B"	24.2	30	30
RE9D/U15C4	Single	65.4	82	90
	Dual "A"	44.6	56	60
	Dual "B"	20.8	26	30
RE9D/U17C4	Single	70.4	88	90
	Dual "A"	47.9	60	60
	Dual "B"	22.5	28	30
RE9D/U20C4	Single	86.2	108	125
	Dual "A"	44.6	56	60
	Dual "B"	41.7	52	60
RE9D/U23C4	Single	93.8	117	125
	Dual "A"	45.5	57	60
	Dual "B"	48.0	60	60

Revolv® RE9 Clearances						
All Models	Front ¹	Back	Sides ²	Top	Top & Sides of Duct	Bottom of Duct
Closet	6"	0"	0"	0"	0"	0"
Alcove	18"	0"	0"	0"	0"	0"
¹ Service Clearance						
² For applications using upflow stand, 1" minimum per side						

Revolv® RE9 Accessories	
Part Number	Description
1007729	ECM Blower Kit
902985	5-Ton Blower
902989	Top Grille / Frame
903891	Coil Cabinet Downflow (Front Return)
904620A	Upflow Stand
281241R	Replacement Door for Upflow Stand
1006730	Coil Cabinet Upflow & Downflow, Solid Door
1006731	Coil Cabinet Upflow & Downflow, Louvered Door



Style Crest®, Inc.
2450 Enterprise St.
Fremont, Ohio 43420
800.945.4440
www.stylecrestinc.com

Printed in U.S.A. Product availability and product specifications subject to change without notice.

©Copyright 2017 04/07/17 Revolv RE Electric Furnace 2PG RVL-0029