

Job Name/Location:

Tag No.:

Date:

For:	File	Resubmit
	Approval	Other

PO No.:

Architect: GC:

Engr: Mech:

Rep:

(Company)

(Project Manager)

LC188HHV4
Single-Zone 2x2 Four-Way Ceiling Cassette with LGRED®
 Outdoor Unit (ODU) - LUU180HHV, Indoor Unit (IDU) - LCN188HV4

Performance:

Cooling:

Cooling Capacity (Min~Rated~Max, Btu/h)	7,200 ~ 18,000 ~ 24,800
SEER	20.00
EER	12.80

SEER - Seasonal Energy Efficiency Ratio

EER - Energy Efficiency Ratio

Heating:

Heating Capacity (Min~Rated~Max, Btu/h)	6,500 ~ 20,000 ~ 23,700
HSPF	11.20
Max. Heating @ Indoor 70°F DB (Btu/h)	
Outdoor 17°F WB	22,610
Outdoor 5°F WB	20,000
Outdoor -4°F WB	17,920
Outdoor -13°F WB	15,990

HSPF - Heating Seasonal Performance Factor

Heating Nominal Test Conditions:

Cooling Nominal Test Conditions:

Indoor: 70°F DB / 60°F WB

Indoor: 80°F DB / 67°F WB

Outdoor: 47°F DB / 43°F WB

Outdoor: 95°F DB / 75°F WB

Electrical:

Power Supply (V/Hz/Ø)	208-230/60/1
MOP (A)	30
MCA (A)	22
Cooling / Heating Rated Amps (A)	6.3 / 8.0
Compressor (A)	14.5
Fan Motor (IDU + ODU) (A)	0.6 + 1.6
Cooling Power Input (Min~Rated~Max, kW)	0.53~1.41~2.85
Heating Power Input (Min~Rated~Max, kW)	0.46~1.80~2.60
Locked Rotor Amps (A)	23

MOP - Maximum Overcurrent Protection

MCA - Minimum Circuit Ampacity

Piping:

Installed Liquid Pipe (in., O.D.)	3/8 Flare
Installed Vapor Pipe (in., O.D.)	5/8 Flare
IDU Liquid Connection (in., O.D.)	1/4 Flare
IDU Vapor Connection (in., O.D.)	1/2 Flare
Additional Refrigerant (oz./ft.)	0.43
Min. / Max. Pipe Length (ft.) ²	16.4 / 164
Piping Length (no add'l refrig., ft.)	24.9
Max. Elevation (ft.)	98.4

Features:

- Inverter (Variable Speed Compressor)
- Jet Cool
- Auto Restart
- Internal Condensate Pump
- Auto Changeover
- Drain pan heater
- Swirl Wind
- Ultra-quiet Turbo Fan
- Night Quiet Function
- Optional Wi-Fi Control
- IDU compatible with Multi F ODUs

Included Accessories:

- Wireless Remote Controller - PQWRHQ0FDB

Required Accessories:

- Grille Kit - PT-UQC or PT-QCHWO

Optional Accessories:

- Simple Controller - PREMTCC00U
- Premium Controller - PREMTA000
- MultiSITE™ CRC1 - PREMTBVC0
- MultiSITE CRC1+ - PREMTBVC1
- MultiSITE Comm. Mgr. - PBACNBTR0A
- PI-485 - PMNFP14A1
- Dry Contact - PDRYCB320
- LonWorks® Gateway - PLNWK100
- AC Smart 5 BACnet® Gateway - PACSA000
- ACP 5 BACnet Gateway - PACPSA000
- Outside Air Flange - PTVK430
- Wi-Fi Module - PWFMD200
- Low Ambient Wind Baffle - ZLABGP04A¹¹

For a complete list of available accessories, contact your LG representative.
 For continual product development, LG reserves the right to change specifications without notice.
 © LG Electronics U.S.A., Inc., Englewood Cliffs, NJ. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. /www.lghvac.com



Operating Range:

Outdoor Unit:

Cooling (°F DB)	5 ~ 118
Heating (°F WB)	-13 ~ +64

Indoor Unit:

Cooling (°F WB)	57 ~ 77
Heating (°F DB)	59 ~ 81

System Data:

Refrigerant Type	R410A
Refrigerant Control	EEV
Refrigerant Charge (lbs.)	4.41
ODU Sound Pressure (Cooling / Heating) (±1 dB[A]) ³	51 / 52
IDU Sound Pressure (H/M/L/SL) (±1 dB[A]) ³	41 / 39 / 36 / 33
ODU Net / Shipping Weight (lbs.)	133.4 / 144.4
IDU Net / Shipping Weight (lbs.)	31.5 / 40
Grille Net Weight (lbs.)	7
Heat Exchanger Coating	GoldFin™

Fan:

ODU Type	Propeller
IDU Type	Turbo
Fan Speeds (Fan/Cool/Heat)	4 / 5 / 4
Quantity (ODU + IDU)	1 + 1
Motor/Drive	Brushless Digitally Controlled/Direct
Maximum ODU Air Volume (CFM)	2,048
IDU Air Flow (CFM Max./H/M/L)	494 / 460 / 424 / 388
Dehumidification (pts./hr.)	4.28

Notes:

1. Acceptable operating voltage: 187V-253V.
2. Piping lengths are equivalent.
3. Sound Pressure levels are tested in an anechoic chamber under ISO Standard 3745.
4. All communication / connection (power) cable from the outdoor unit to the indoor unit is field supplied and must be a minimum of four-conductor, 14 AWG, stranded, shielded or unshielded (if shielded, it must be grounded to the chassis of the outdoor unit only), and must comply with applicable local and national codes.
5. See Engineering Manual for sensible and latent capacities.
6. Power wiring cable size must comply with the applicable local and national code.
7. This unit comes with a dry helium charge.
8. This data is rated 0 ft. above sea level, with 24.6 ft. of refrigerant line and a 0 ft. level difference between outdoor and indoor units.
9. Must follow installation instructions in the applicable LG installation manual.
10. Multi compatible 18k IDUs include socket adapters for refrigerant pipe connections with Single Zone systems.
11. If the optional low ambient wind baffle (ZLABGP04A) is used, one wind baffle is required for each ODU fan.

BACnet® is a registered trademark of ASHRAE. LonWorks® is a trademark of Echelon Corporation.




LC188HHV4
 Single-Zone 2x2 Four-Way Ceiling Cassette with LGRED®
 Outdoor Unit (ODU) - LUU180HHV, Indoor Unit (IDU) - LCN188HV4



Tag No.: _____

Date: _____

PO No.: _____

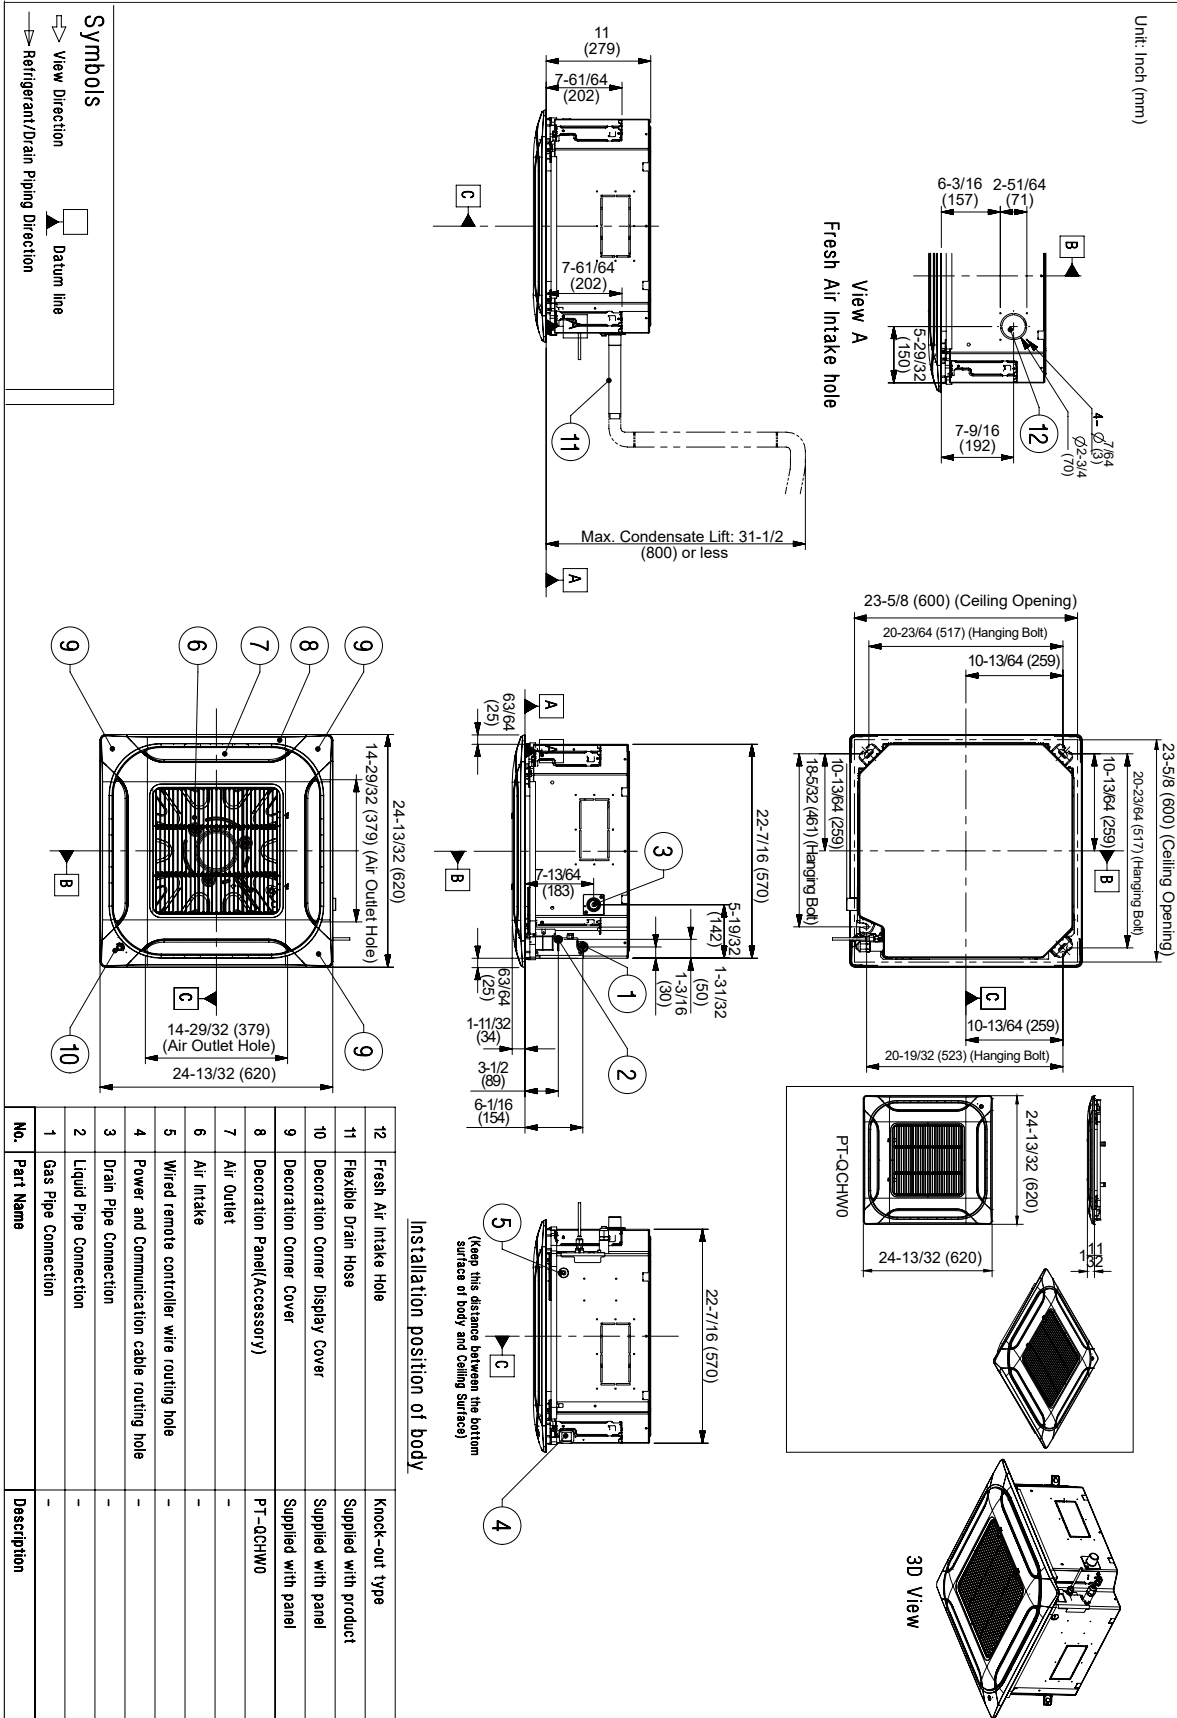

Symbols
 View Direction
 Refrigerant/Drain Piping Direction
 Datum line

No.	Part Name	Description
1	Gas Pipe Connection	-
2	Liquid Pipe Connection	-
3	Drain Pipe Connection	-
4	Power and Communication cable routing hole	-
5	Wired remote controller wire routing hole	-
6	Air Intake	-
7	Air Outlet	-
8	Decoration Panel(Accessory)	PT-QCHW0
9	Decoration Corner Cover	Supplied with panel
10	Decoration Corner Display Cover	Supplied with panel
11	Flexible Drain Hose	Supplied with product
12	Fresh Air Intake Hole	Knock-out type