

# MDG150DF4 | 6.8L | 150kVA

## MOBILE DIESEL GENERATOR SET

EPA Emissions Certification: Tier 4 Final

### Standby Power Rating

144 kW, 180 kVA, 60 Hz

### Prime Power Rating

120 kW, 150 kVA, 60 Hz



Image used for illustration purposes only



\*Assembled in the USA using domestic and foreign parts

## Codes and Standards

Generac Mobile products are designed to the following standards:



CSA CERTIFIED



NATM



TIER 4 FINAL EMISSIONS



UN31A, UL142, ULC-S601  
CERTIFIED

## Power When and Where You Need It

Generac Mobile diesel generators are designed and engineered to power a variety of projects, in the most extreme environments. Gensets are configured to meet customer needs, including choice of containment, cold weather packages, trailer options, and more.

Generac Mobile diesel generators are manufactured to deliver reliable power, when and where you need it.

**STANDARD FEATURES****ENGINE SYSTEM**

- John Deere® 6068HFG05
- 6 Cylinder
- Variable-geometry Turbocharged (VGT) and Aftercooled
- 415 in<sup>3</sup> (6.8 L) Displacement
- Power @ 1,800 rpm – hp (kW):
  - Prime: 196 (146)
  - Standby: 215 (160)
- Paper Element Air Filter
- Electronic Isochronous Governing
- Variable Speed Fan
- One Spin-on Cartridge Oil Filter
- Oil Drain Extension
- One CCV System Filter
- One Fuel/Water Separator-Filter
- One Fuel Filter
- One 12 V, 950 CCA Wet Cell Battery

**COOLING SYSTEM**

- Capable of Operating at 120 °F (49 °C) Ambient
- 50/50 Coolant (50% Ethylene Glycol)
- Coolant Drain Extension

**FUEL SYSTEM**

- Single Wall Fuel Tank
- Fuel Tank Capacity – gal (L):
  - Total: 358 (1,355)
  - Usable: 343 (1,298)
- Runtime @ 75% load: 48 hr
- DEF tank capacity – gal (L):
  - Total: 28.5 (107.9)
  - Usable: 34.5 (130.6)
- Padlockable Fuel and DEF Tank Caps

**CONTROL SYSTEM**

- Deep Sea Electronics® 7310 MKII Controller
- 3-Position Voltage Selection Switch
- 600 A Main Circuit Breaker (MCB), Manual
- Individual Convenience Receptacle Circuit Breakers
- Emergency Stop Switch
- Remote 2-wire Start/Stop Contacts

**ALTERNATOR SYSTEM**

- 60 Hz Engine-Driven Alternator
- Standard Alternator
  - Brushless
  - 4-pole
  - 2/3 Pitch
  - Class H Insulation
  - Corrosion Protection
- Marathon Electric® PM500 AVR
- Shunt Excitation System

**POWER DISTRIBUTION**

- Connection Lugs
- Convenience Receptacles
  - Two 120 V, 20 A, GFCI Duplex Receptacles (NEMA 5-20R)
  - Three 120/240 V, 50 A, 3 Pole, 4 Wire Twist-lock Receptacles (CS6369)

**ENCLOSURE**

- Aluminum, Sound Attenuated Enclosure, Insulated and Baffled
- UV and Fade Resistant, High Temperature Cured, White Polyester Powder Paint
- Central Lifting Point
- 4 Point Lift
- Control Panel Lights
- Interior Lights
- Fully Lockable Enclosure
- Multilingual Operating and Safety Decals
- Document Holder with Owner's Manual — Includes AC and DC Wiring Diagrams

**TRAILER**


- Hydraulic Surge Brakes
- 3 in (76.2 mm) Pintle Ring, Adjustable
- Two 7,000 lb (3,175 kg) Axles
- 17.5 in Tires, Tubeless, 10 ply
- Heavy Duty Trailer Jack
- Safety Chains with Spring Loaded Safety Hooks
- Transportation Tie Downs
- Plug Adapter, Round 7 Blade (SAE J2863)
- DOT Approved Tail, Side, Brake, and Directional Lights

**WARRANTY**

- 2 year limited or 2,000 hours
  - Unlimited hours covered in first year

**STANDARD FEATURES**

**CONTROL SYSTEM**

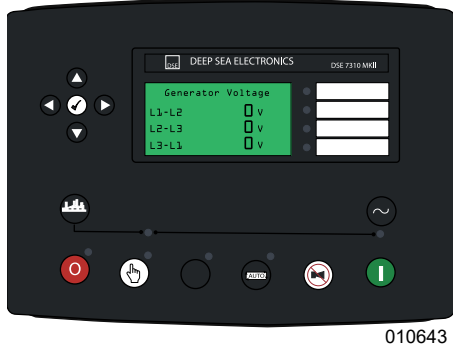

010643

**Deep Sea Electronics® CONTROLLER AND DISPLAY**

- Model DSE7310 MKII
- 4 Line Back Lit LCD Text Display
- -40 to 158 °F (-40 to 70 °C) Operating Temperature Range
- Multiple Language Options
- Configurable Timers and Alarms
- Configurable Start/Stop Timers
- Configurable Maintenance Alarms
- Heated Display

**PUSH BUTTONS FOR EASY OPERATION**

- Manual or Auto Start
- Engine Start
- Engine Stop/Reset
- User Friendly Setup and Button Layout
- Five Key Menu Navigation
- Hours Counter
- Multiple Parameters are Monitored and Displayed Simultaneously for Full Visibility
- View Controller Parameters (Configuration, Firmware Version, Connections)

**LCD ALARM INDICATION**

- Generator Diagnostic Display
  - System kVA Output Display
  - Line Output and Frequency Display
- Alarm Types: Warning, Shutdown, Electrical Trip, Engine
- Alarm List – Warnings/Shutdowns; 250 Event History Log – Date/Time Stamped
  - Fuel Level: Warning – 15%; Shutdown – 5%
  - Overspeed Protection: Shutdown – 110%
  - Engine Diagnostic Warnings Communicated Through J1939 CANbus
  - Battery Voltage: Over – 15 VDC; Under – 11 VDC
  - Generator Over Voltage: Warning – 110%; Electrical Trip – 115%

- Generator Under Voltage: Warning – 90%; Shutdown – 85%
- Generator Over Frequency: Warning – 105%; Electrical Trip – 110%
- Generator Under Frequency: Warning – 95%; Electrical Trip – 90%

- Auto Schedule
- Status

**ELECTRICAL CONTROLS**

- Lockable Control Box Door with Diagnostics Window
- Lockable Lug Box with Safety Switch
  - Trips Main Breaker when Door is Opened
  - Disables Voltage Regulator
- Output Ground Connection Lug Inside Lug Box
- Voltage Adjustment ±10%

**CONFIGURABLE OPTIONS\***

**ENGINE SYSTEM**

- Positive Air Shutdown (PAS), Electronic
- Engine Oil Level Maintainer
- Oil Evacuation System - Requires Customer-sourced, Specialized Equipment to Use for Oil Change

**COLD WEATHER**

- Engine Block Heater
- Two Heated Fuel Filters
- Oil Heater
- Crank Case Ventilation (CCV) System Heater
- Battery Heater
- 10 A Battery Charger
- 60/40 Coolant (60% Ethylene Glycol)

**FUEL SYSTEM**

- Double Wall Fuel Tank
  - 110% Containment Fuel and Engine Fluid (Oil, Coolant, and DEF)
  - UN31A Certification
  - UL142 / ULC-S601 Certification
- Fuel Tank Capacity-gal (L)
  - Total: 358 (1,355)
  - Usable: 343 (1,298)

\*Consult factory for availability

- Runtime @75% load: 48 hr
- Double Wall Fuel Tank, Extended Runtime
  - 110% Containment Fuel and Engine Fluid (Oil, Coolant, and DEF)
  - UN31A Certification
  - UL142 / ULC-S601 Certification
- Fuel Tank Capacity—gal (L)
  - Total: 513 (1,942)
  - Usable: 462 (1,749)
- Runtime @ 75% load: 65 hr
- Fuel Leak Detection Sensor

**CONTROL SYSTEM**

- 4-Position Voltage Selection Switch
- Paralleling Capability
  - Deep Sea Electronics® 8610 MKII Controller
  - 500 A Main Circuit Breaker (MCB), Motorized
  - Mobile Switching Center (MSC) Cable Connections
- Telemetry
- Lojack Equipment Recovery System
- Battery Disconnect Switch, Lockable

**ALTERNATOR SYSTEM**

- SUPERSTART® Alternator
- VFLEX (600 V) Alternator
- Marathon Electric® DVR2400 DVR
- Permanent Magnet Generator (PMG) Excitation System

**POWER DISTRIBUTION**

- Camlocks - Two Sets, Female (US or Canada Color Code)
- Buck Transformer

**ENCLOSURE**

- Fire Extinguisher

**TRAILER**

- Skid Mount (Non-trailer)
- Electric Brakes
- 2-5/16 in (58.7 mm) Ball Hitch, Adjustable
- Rear Jack Group
- Toolbox-Aluminum, 49x15x18.5 in (125x38x47 cm)
- Spare Tire

# MDG150DF4 | 6.8 L | 150kVA

## MOBILE DIESEL GENERATOR SET

EPA Emissions Certification: Tier 4 Final



### RATING DEFINITIONS

*Standby:* Applies to varying emergency load for the duration of a utility power outage.

*Prime:* Applies to supplying power to a varying load in lieu of utility for an unlimited amount of running time.



### APPLICATION AND ENGINEERING DATA

#### ENGINE SPECIFICATIONS

##### General

|                                    |                              |
|------------------------------------|------------------------------|
| Make (Model)                       | John Deere® (6068HFG05)      |
| EPA Emissions Compliance           | Tier 4 Final                 |
| After Treatment System             | DOC and SCR                  |
| Cylinders – Qty                    | 6                            |
| Type                               | In-Line                      |
| Displacement – in <sup>3</sup> (L) | 415 (6.8)                    |
| Bore – in (cm)                     | 4.2 (10.6)                   |
| Stroke – in (cm)                   | 5.0 (12.7)                   |
| Compression Ratio                  | 17.2:1                       |
| Intake Air Method                  | Turbocharged and Aftercooled |

##### Engine Governing

|                                     |            |
|-------------------------------------|------------|
| Governor                            | Electronic |
| Frequency Regulation (Steady State) | ±2%        |

##### Lubrication System

|                             |                   |
|-----------------------------|-------------------|
| Oil Pump Type               | Gear              |
| Oil Filter Type             | Spin-On Cartridge |
| Crankcase Capacity – qt (L) | 34.3 (32.5)       |

##### Cooling System

|                                  |                       |
|----------------------------------|-----------------------|
| Cooling System Type              | Pressurized Closed    |
| Water Pump Type                  | Engine Belt Driven    |
| Fan Type                         | Pusher                |
| Fan Speed – rpm                  | Variable Speed Clutch |
| Fan Diameter – in (cm)           | 28 (71)               |
| Cooling System Capacity – qt (L) | 44 (42)               |

##### Fuel System

|                                     |  |
|-------------------------------------|--|
| Fuel Type                           | Ultra low Sulfur Diesel                    |
| Fuel Specifications                 | EN 590 / ASTM D975                         |
| Fuel Filtering – μ                  | Primary: 10<br>Final: 2                    |
| Fuel Inject Pump – Make (Model)     | Denso (HP6)                                |
| Fuel Pump Type                      | Engine Gear Driven                         |
| Injector Type                       | Electronic                                 |
| Engine Type                         | Direct Injection High Pressure Common Rail |
| Fuel Supply Line Diameter – in (mm) | 0.375 (9.5)                                |
| Fuel Return Line Diameter – in (mm) | 0.375 (9.5)                                |

##### Engine Electrical System

|                      |              |
|----------------------|--------------|
| System Voltage – VDC | 12           |
| Battery Size – CCA   | 950          |
| Battery – V (Qty)    | 12 (1)       |
| Ground Polarity      | Negative (-) |

**APPLICATION AND ENGINEERING DATA (CONT.)**

**STANDARD ALTERNATOR SPECIFICATIONS**

|                               |                                |
|-------------------------------|--------------------------------|
| Make (Model)                  | Marathon Electric (363CSL1607) |
| Poles                         | 4                              |
| Field Type                    | Rotating                       |
| Insulation Class – Rotor      | H                              |
| Insulation Class – Stator     | H                              |
| Total Harmonic Distortion     | <5%                            |
| Telephone Interference Factor | <50                            |

|                                    |                                |
|------------------------------------|--------------------------------|
| Standard Excitation                | Shunt                          |
| Bearings                           | Double Shielded, Prelubricated |
| Coupling                           | Direct Flexible Disc           |
| Prototype Short Circuit Test       | Yes                            |
| Voltage Regulator Type             | AVR                            |
| Quantity of Sensed Phases          | 1                              |
| Regulation Accuracy (Steady State) | ±0.5%                          |

**SUPERSTART® ALTERNATOR SPECIFICATIONS**

|                               |                                |
|-------------------------------|--------------------------------|
| Make (Model)                  | Marathon Electric (431CSL6208) |
| Poles                         | 4                              |
| Field Type                    | Rotating                       |
| Insulation Class – Rotor      | H                              |
| Insulation Class – Stator     | H                              |
| Total Harmonic Distortion     | <5%                            |
| Telephone Interference Factor | <50                            |

|                                    |                                |
|------------------------------------|--------------------------------|
| Standard Excitation                | Shunt                          |
| Bearings                           | Double Shielded, Prelubricated |
| Coupling                           | Direct Flexible Disc           |
| Prototype Short Circuit Test       | Yes                            |
| Voltage Regulator Type             | AVR                            |
| Quantity of Sensed Phases          | 1                              |
| Regulation Accuracy (Steady State) | ±0.5%                          |

**VFLEX ALTERNATOR SPECIFICATIONS**

|                               |                                |
|-------------------------------|--------------------------------|
| Make (Model)                  | Marathon Electric (431PSL6611) |
| Poles                         | 4                              |
| Field Type                    | Rotating                       |
| Insulation Class – Rotor      | H                              |
| Insulation Class – Stator     | H                              |
| Total Harmonic Distortion     | <5%                            |
| Telephone Interference Factor | <50                            |

|                                    |                                |
|------------------------------------|--------------------------------|
| Standard Excitation                | Shunt                          |
| Bearings                           | Double Shielded, Prelubricated |
| Coupling                           | Direct Flexible Disc           |
| Prototype Short Circuit Test       | Yes                            |
| Voltage Regulator Type             | AVR                            |
| Quantity of Sensed Phases          | 1                              |
| Regulation Accuracy (Steady State) | ±0.5%                          |

**OPERATING DATA**

**POWER RATINGS**

|  | Standard Alternator    |                      | SUPERSTART Alternator  |                      | VFLEX Alternator       |                      |
|--|------------------------|----------------------|------------------------|----------------------|------------------------|----------------------|
|  | Standby:<br>kW/kVA (A) | Prime:<br>kW/kVA (A) | Standby:<br>kW/kVA (A) | Prime:<br>kW/kVA (A) | Standby:<br>kW/kVA (A) | Prime:<br>kW/kVA (A) |
| 1-phase, 120/240 VAC @ 1.0 pf—zig zag* | 95/95 (395)            | 95/95 (395)          | 95/95 (395)            | 95/95 (395)          | 73/73 (304)            | 73/73 (304)          |
| 3-phase, 208/120 VAC @ 0.8 pf—low wye  | 144/180 (503)          | 120/150 (416)        | 144/180 (503)          | 120/150 (416)        | 144/180 (503)          | 120/150 (416)        |
| 3-phase, 240/120 VAC @ 0.8 pf—delta**  | 144/180 (433)          | 120/150 (360)        | 144/180 (433)          | 120/150 (360)        | 144/180 (433)          | 120/150 (360)        |
| 3-phase, 480/277 VAC @ 0.8 pf—high wye | 144/180 (218)          | 120/150 (180)        | 144/180 (218)          | 120/150 (180)        | 144/180 (218)          | 120/150 (180)        |
| 3-phase, 600/346 VAC @ 0.8 pf—high wye | N/A                    | N/A                  | N/A                    | N/A                  | 144/180 (173)          | 120/150 (145)        |

\*Alternator limited.

\*\*Power ratings achieved through use of optional 4-position voltage selection switch.

**FUEL AND DEF CONSUMPTION RATES**

| Prime Load     | Fuel: gph (L/hr) | DEF: gph (L/hr) |
|----------------|------------------|-----------------|
| 25%            | 3.4 (12.9)       | 0.07 (0.26)     |
| 50%            | 5.25 (19.8)      | 0.14 (0.53)     |
| 75%            | 7.1 (26.8)       | 0.21 (0.8)      |
| 100%           | 8.7 (33.3)       | 0.28 (1.06)     |
| 110% (Standby) | 9.5 (36.1)       | 0.32 (1.21)     |

Deration – Operational characteristics consider maximum ambient conditions. Derate factors may apply under atypical site conditions.

Please consult a Generac Mobile Authorized Service Dealer for additional details. All performance ratings in accordance with ISO3046, BS5514, ISO8528, ISO 8665, ISO 3046 SAE J1228, SAE J1995, and DIN6271 standards.


# MDG150DF4 | 6.8 L | 150kVA

## MOBILE DIESEL GENERATOR SET

EPA Emissions Certification: Tier 4 Final



### DIMENSIONS AND WEIGHTS\*

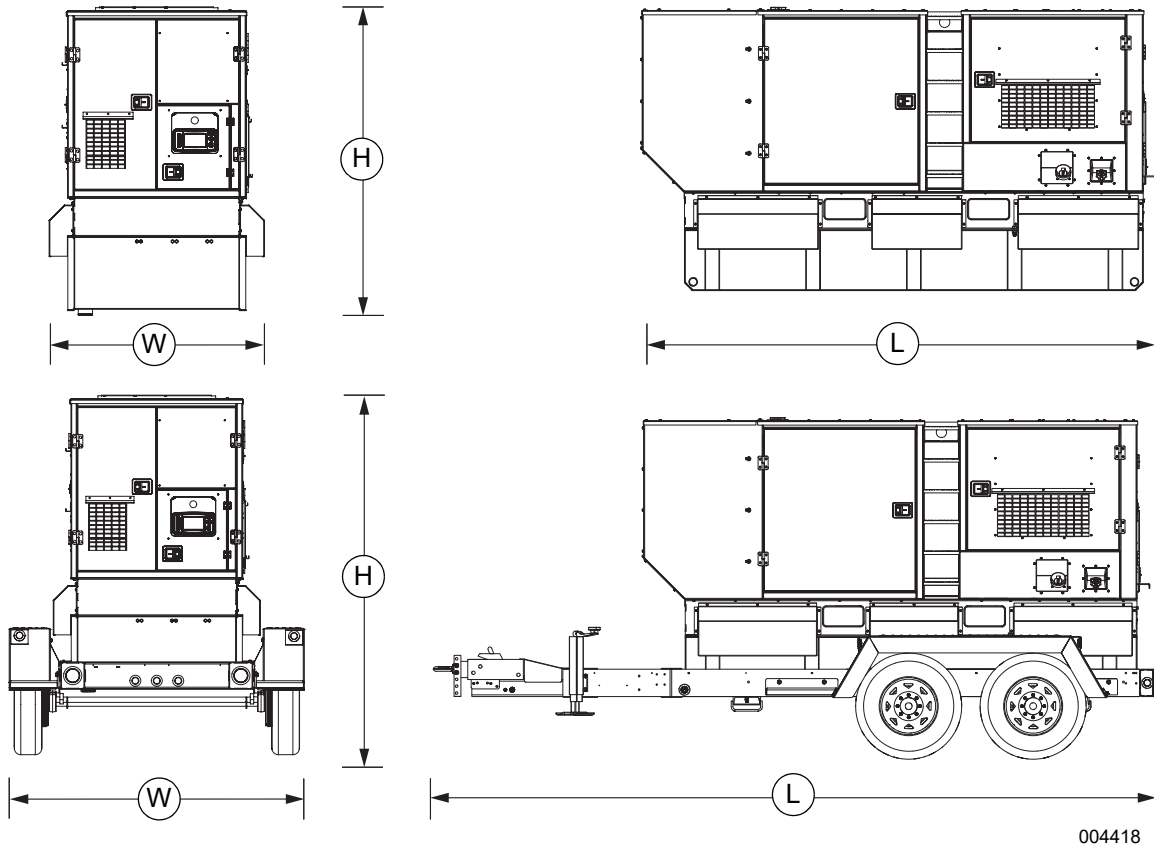

004418

|         | Runtime: hr* | Usable Fuel Capacity: gal (L) | Dimensions – L×W×H: in (m)       | Weight: lb (kg)                                 |
|---------|--------------|-------------------------------|----------------------------------|---|
| Skid    | 48           | 343 (1,298)                   | 145 (3.7) × 60 (1.5) × 92 (2.3)  | Dry: 6,219 (2,820)<br>Operating: 9,075 (4,116)  |
| Trailer | 48           | 343 (1,298)                   | 208 (5.3) × 86 (2.2) × 104 (2.6) | Dry: 8,184 (3,712)<br>Operating: 11,040 (5,007) |

\* Runtime based on 75% of prime rated power.

### SOUND RATING

- 75 dB(A) @ 23 ft (7 m) @ 100% PRP

\* All measurements are approximate and for estimation purposes only.

**YOUR FACTORY RECOGNIZED GENERAC MOBILE DEALER**

Specification characteristics may change without notice. Dimensions and weights are for preliminary purposes only. Please consult a Generac Mobile Authorized Service Dealer for detailed installation drawings.