

Schluter®-DITRA-HEAT

Electric floor warming system with integrated uncoupling technology



NEW!
Wi-Fi Thermostat



PROFILE OF INNOVATION




Bare Feet WANTED

DITRA-HEAT is the first electric floor warming system with integrated uncoupling technology to ensure that floors are both comfortable, and resistant to cracked tiles and grout. Cables can be placed wherever heat is desired for customized heating zones, and no leveling compounds are required, which makes for a quick and easy installation.

- Heating and uncoupling in a single layer
- No self-levelers required to encapsulate heating cables (no need to wait for curing)
- Place the heating cables exactly where they are needed, without clips or fasteners
- Combines the flexibility of loose cable with the ease of installation of a mat system
- Minimizes assembly thickness for easy transitions to lower surface coverings

NEW!

DITRA-HEAT-DUO



Uncoupling membrane with integrated sound control and thermal break.

DITRA-HEAT-E-WiFi



Access your floor heating system, anywhere, anytime.

EASY TO INSTALL



- 1 Apply DITRA-HEAT or DITRA-HEAT-DUO to the floor, fleece side down. Solidly embed the matting into the mortar.



- 2 Embed the heating cables between studs, at spacing of 3 studs.




- 3 Using Schluter SET™, ALL-SET™, FAST-SET™, or unmodified thin-set mortar, tile can be installed over DITRA-HEAT and DITRA-HEAT-DUO immediately; no need for self-levelers.




Customizable heating zones

Heat your whole floor...



Or heat a specific area...

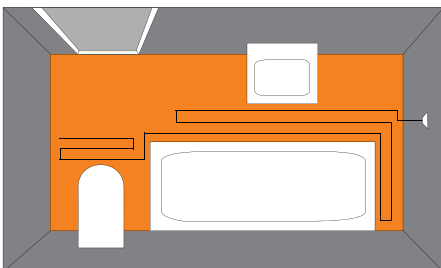

With DITRA-HEAT, it's your tile floor, warmed the way you want it.



MEASURING GUIDE

Membrane is selected according to the size of the area to be *tiled*.

Heating cable is selected according to the size of the area to be *heated*. Be sure to measure the heated area accurately.

The allowable heated area is limited by the minimum required spacing from fixed elements such as:

- Walls/partitions/fixed cabinets = 2" (50 mm)
- Heat sources (baseboard heaters, fireplaces, forced air heating ducts, etc.) = 8" (200 mm)
- Plumbing drains = 4" (100 mm)
- Centerline of toilet drains = 7" (180 mm)

Select a heating cable closest to, but not exceeding the area determined in step 3 below. Do not select a heating cable according to the size of the area to be tiled; this will be too much heating cable. Only select a heating cable according to the size of the area to be heated.

Using Multiple Cables

Two DITRA-HEAT-E-HK heating cables can be connected in parallel and controlled by a single DITRA-HEAT-E thermostat if the total current is less than 15 amps. This work must be performed by a qualified electrician in accordance with applicable electrical and building codes.

IMPORTANT: HEATING CABLES CANNOT BE CUT TO FIT

Never install the heating cable under vanities, bathtub platforms, free standing bathtubs, kitchen cabinets or any other fixtures or in closets. Excessive heat will build up in these confined spaces and may cause cable overheating.

Please refer to the Schluter®-DITRA-HEAT Installation Handbook for complete installation details and warranty criteria.



Step 1 Draw Room

Draw the room on a sheet of paper.

Step 2 Calculate Membrane Required

Measure areas where the membrane will be installed. The total will tell you how much DITRA-HEAT or DITRA-HEAT-DUO membrane is required.

Area	Dimensions (Inches)	Total
A ₁		
A ₂		
A ₃		
A ₄		
Divide total by 144 to get measurement in ft ²		÷ 144
Grand Total Membrane		

Step 3 Calculate Cable Size(s)

Measure areas where the heating cable is to be installed. The total tells you the maximum DITRA-HEAT-E-HK heating cable amount.


Area	Dimensions (Inches)	Total
B ₁		
B ₂		
B ₃		
B ₄		
Divide total by 144 to get measurement in ft ²		÷ 144
Grand Total Heating Cable		



Once you have your measurements, try our DITRA-HEAT calculator to determine which components you need to complete your floor warming project.

[schluter.com](https://www.schluter.com)


Example

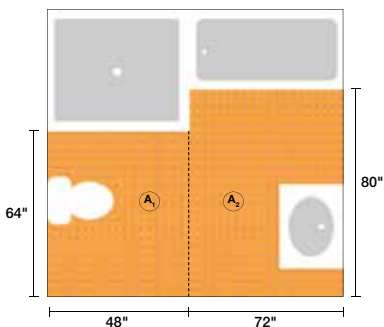

DITRA-HEAT or DITRA-HEAT-DUO Membrane




Area	Dimensions	Total
A_1	64" x 48"	3072 in ²
A_2	80" x 72"	5760 in ²
A_3	-	-
A_4	-	-
Divide total by 144 to get measurement in ft ²		8832 in ² ÷ 144
Grand Total Membrane		61.5 ft²

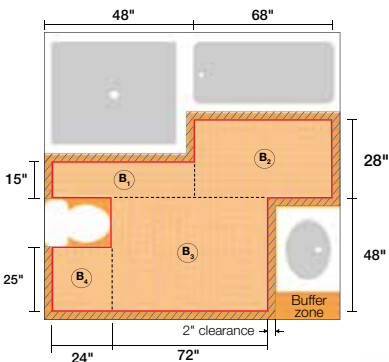


DITRA-HEAT-E-HK Heating Cable



Area	Dimensions	Total
B_1	15" x 48"	720 in ²
B_2	28" x 68"	1904 in ²
B_3	48" x 72"	3456 in ²
B_4	25" x 24"	600 in ²
Divide total by 144 to get measurement in ft ²		6680 in ² ÷ 144
Grand Total Heating Cable		46.5 ft²

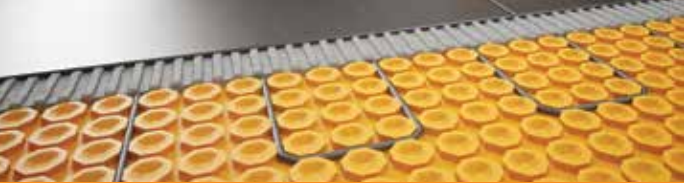

Components



DITRA-HEAT Membranes

The DITRA-HEAT and DITRA-HEAT-DUO membranes are available in both mat and roll formats. They are each designed to secure the system heating cables and serve as a universal substrate for tile coverings. DITRA-HEAT-DUO also features an integrated thermal break designed to provide up to 70% faster heat-up times over concrete substrates and reduce impact sound transmission through floor-ceiling assemblies.

DITRA-HEAT membrane: U.S. Pat. No. 8,950,141, and U.S. DES. PAT. No. D706459

Canada © Schluter Systems L.P. and other patents pending

DITRA-HEAT-DUO membrane: Patent pending



Heating Cable

The twisted pair heating cable is available in 120 and 240 Volt formats. The cables can be installed without returning to the thermostat and produce virtually no electromagnetic fields.




Digital Thermostats

The digital thermostat controls the floor temperature and is offered in touchscreen, programmable with or without WiFi capability, and non-programmable formats. A power module can be used in large floor applications where the heating load exceeds 15 amps.



Schluter®-Systems offers practical kits for common room configurations that include all necessary system components in the right dimensions.

We stand behind our products.

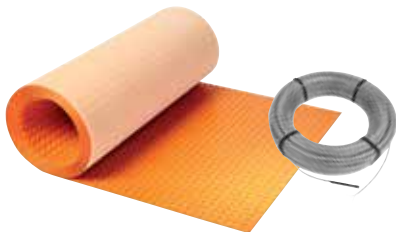

Membrane + Cables = **System Warranty!**

DITRA-HEAT is a complete system involving components that are designed to work together. As such, DITRA-HEAT-E-HK cables must be used in conjunction with the DITRA-HEAT membrane to benefit from the full system warranty. For full warranty details, please visit:

schluter.com/warranty

Visit **Schluter.com** for everything you need to know about DITRA-HEAT, including:



Videos



Calculator



Downloads



Schluter Systems L.P.

194 Pleasant Ridge Road, Plattsburgh, NY 12901-5841
Tel.: 800-472-4588 • Fax: 800-477-9783

Schluter Systems (Canada) Inc.

21100 chemin Ste-Marie, Ste-Anne-de-Bellevue, QC H9X 3Y8
Tel.: 800-667-8746 • Fax: 877-667-2410

www.schluter.com