

1/4 HP SUBMERSIBLE UTILITY PUMP

WH25U

The Westinghouse 1/4 HP Submersible Utility pump is a powerful portable multipurpose water removal device designed to remove water from shallow flooded areas. Its portable design allows it to be a dynamic piece that can help you remove water from any space in your yard or home.

System Includes

- 1/4 HP Submersible pump
- Garden hose adapter

Features and Benefits


- Corrosion-resistant, reinforced thermos plastic construction
- Energy-efficient PSC motor for low running cost
- Oil-filled motor for maximum heat dissipation
- Lubricated ball bearings and shaft seal for long life
- Bottom suction design filters debris and removes water down to 1/8"
- T-handle for easy portability

- 1** **Stainless-steel shaft** combined with the high molecular weight thermoplastic shell gives the system a corrosion resistant design allowing for a long life
- 2** **Permanent Split Capacitor motor** is a higher efficiency motor that allows for a stronger pumping capacity and lower energy cost!
- 3** **Bottom suction** design filters debris and removes water down to 1/8"
- 4** **T-handle** is a grab and go design for easy portability
- 5** **1" NPT discharge** with garden hose adapter included



		Discharge Flow (GPH)						
Model No.	HP	0'	5'	10'	15'	20'	25'	Max. lift
UT02501	1/4	1500	1370	1190	960	780	500	28'

Application	
Submersible utility pump for general water transfer	
Motor Specifications	
Voltage	115
Hertz	60
Phase	Single
RPM	3450RPM
Motor Type	Permanent Split Capacitor (PSC)
Insulation	Class B
Circuit Requirements	10 AMP
Duty Rating	Continuous*
Shaft Seal	Lip seal (Rubber and Stainless steel)
Motor Shaft	Stainless steel
Upper Motor Bearing	Ball bearing
Lower Motor Bearing	Ball bearing
Cooling	Oil cooled
Motor Protection	Auto reset thermal overload protector
For continuous, the water depth must be at least 6" to prevent the motor from overheating	
Pump Specifications	
Discharge size	1"NPT & garden hose adapter included
Cord Length	10'
Cord type	SJTW 18AWG/3C, UL list
Pump Housing	Reinforced thermoplastic
Pump Base	Reinforced thermoplastic
Impeller material	Reinforced thermoplastic
Gasket	Rubber
Solids handling	1/8" spherical
Liquid temp.range	32°-95°F
Operation	Non-automatic
Fasteners	Stainless steel

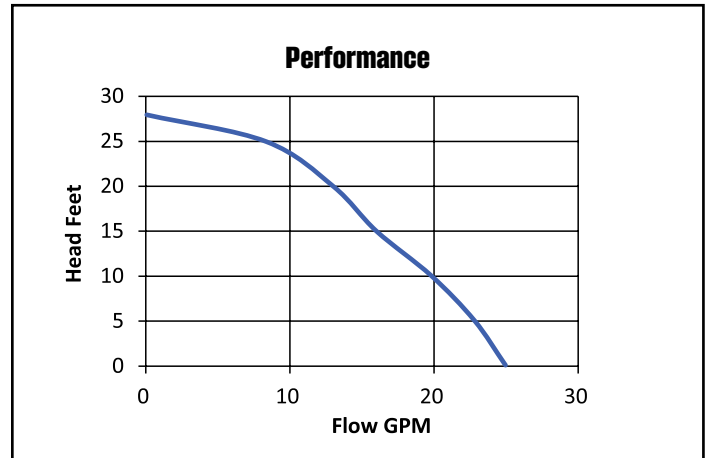

HP	Amps	Discharge Height	0'	5'	10'	15'	20'	25'	28'
1/4	2.3	GPM	25	23	20	16	13	8	0
		GPH	1500	1370	1190	960	780	500	0

