


VERTICAL MODULAR

LV-M 200 - 1,200 CFM

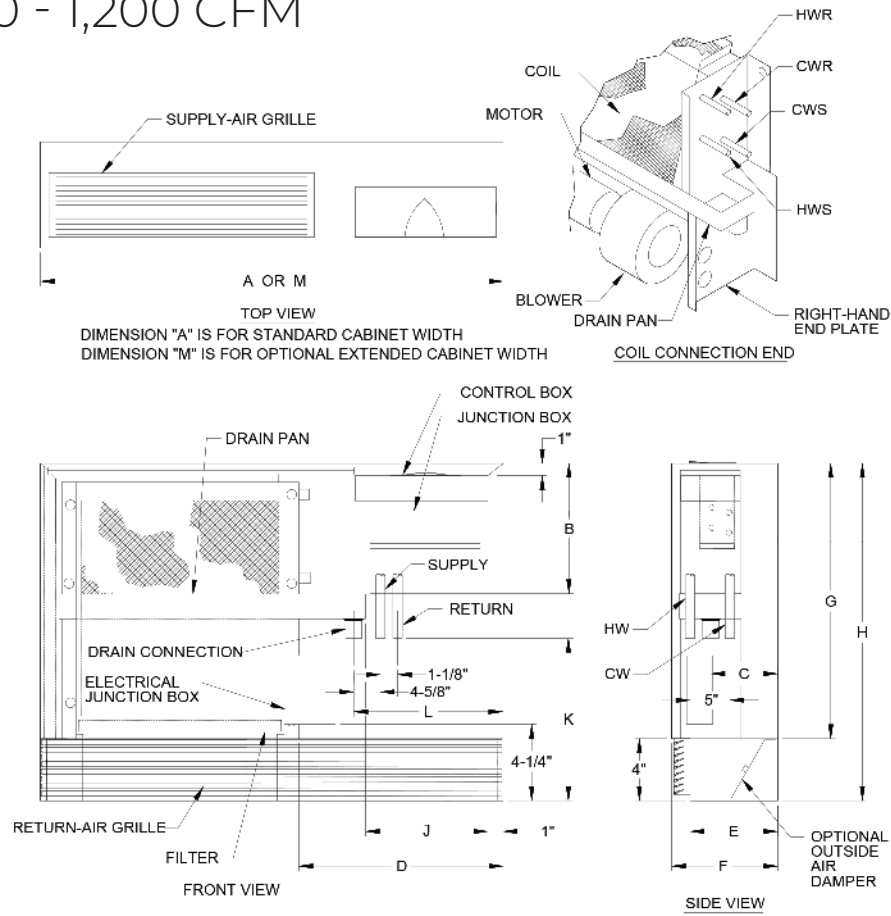

MODEL DELUXE	A	B	C	D	E	F	G	H	J	K	L	M	FILTER SIZE
200	35-1/4	11-1/2	6-1/2	11-1/2	8	11-1/4	22-1/2	26-1/2	7-5/8	10	10	40-7/8	10 x 20 x 1
300	35-1/4	11-1/2	6-1/2	11-1/2	8	11-1/4	22-1/2	26-1/2	7-5/8	10	10	40-7/8	10 x 20 x 1
400	52-1/8	11-1/2	6-1/2	17	8	11-1/4	22-1/2	26-1/2	14-5/16	10	15-1/2	57-3/4	10 x 31 x 1
600	52-1/8	11-1/2	6-1/2	12	8	11-1/4	22-1/2	26-1/2	9-5/16	10	10-1/2	57-3/4	10 x 36 x 1
800	57-3/4	14	8	18-3/4	10	12-1/4	26-1/2	30-1/2	10	12-1/2	11	63-3/8	11 x 34 x 1
1000	57-3/4	14	8	14-1/8	10	12-1/4	26-1/2	30-1/2	9-5/16	12-1/2	11-1/8	63-3/8	11 x 38 x 1
1200	69	14	8	21-3/8	10	12-1/4	26-1/2	30-1/2	16-1/2	12-1/2	19	66	11 X 42 X 1

- All sizes shown in inches.
- Right hand unit shown, left hand unit opposite.
- Coil connections determined by facing the supply air opening.
- Electrical junction box is located on the same side as the coil connections.
- Unit must be installed level and condensate drain lines should be trapped.
- Drain pan is powder-coated epoxy with a 1/8" thick Elastomeric insulation and has 3/4" NPT primary and secondary drain connections.
- Entire cabinet, scroll and blower wheel are heavy gauge, galvanized steel.
- Coil connections: 1/2" CW on LV002-006, 3/4" CW on LV008-012 and 1/2" HW on LV002-012.