



SUBMERSIBLE WELL PUMPS


MODELS 2860G, 2855G, 2850G, 2845G

2-WIRE 4" SUBMERSIBLE WELL PUMPS



| | | | |
|--------------------|-----------------|---------------|---------------|
| MODEL 2860G | 230 VOLT | 1 HP | 10 GPM |
| MODEL 2855G | 230 VOLT | 3/4 HP | 10 GPM |
| MODEL 2850G | 230 VOLT | 1/2 HP | 10 GPM |
| MODEL 2845G | 115 VOLT | 1/2 HP | 10 GPM |

- High capacity heavy duty design. High-impact discharge head and base. Strong stainless-steel shell on pump end and motor
- 10 GPM rated models for maximum efficiency in most homes
- 1-1/4" corrosion-resistant thermoplastic discharge head outlives conventional metals even in the harshest environments
- Built-in check valve to prevent back flow
- High-efficiency motor for fewer energy dollars
- NEMA-standard motor
- Complete installation instructions included
- All units are built with a green ground wire per National Electric Code specifications for ground protection
- Fits inside any 4" opening

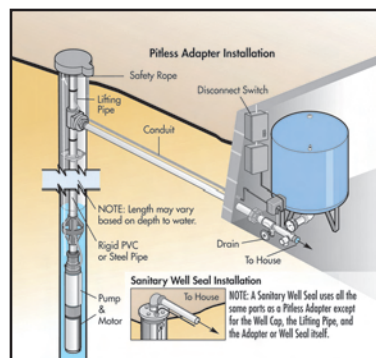

PERFORMANCE

| Model | HP | Warranty | GPM | Voltage | GPM Pumped at Different Depths to Water* | | | | | | | | |
|--------------|-----|----------|-----|---------|--|------|------|------|------|------|------|------|------|
| | | | | | 20' | 40' | 60' | 80' | 100' | 150' | 200' | 250' | 300' |
| 2860G | 1 | 3-year | 10 | 230 | 15.8 | 15.4 | 14.7 | 14 | 13.4 | 11.7 | 9.7 | 7.3 | 4.4 |
| 2855G | 3/4 | 3-year | 10 | 230 | 14.8 | 14.2 | 13.4 | 12.6 | 11.7 | 8.8 | 5.2 | — | — |
| 2850G | 1/2 | 3-year | 10 | 230 | 14.3 | 13.2 | 12.2 | 10.9 | 9.6 | 5 | — | — | — |
| 2845G | 1/2 | 3-year | 10 | 115 | 14.3 | 13.2 | 12.2 | 10.9 | 9.6 | 5 | — | — | — |

*All performances shown in gallons per minute at 40 PSI (pound per square inch) discharge pressure at top of well.

ORDERING INFORMATION

| Model | UPC | Carton (L x W x H) | Cube | Pallet Qty. | Weight |
|--------------|-----------------|---------------------|------|-------------|-----------|
| 2860G | 0 22315 31273 9 | 34.8" x 4.4" x 4.2" | .372 | 44 | 27 lbs. |
| 2855G | 0 22315 31271 5 | 34.8" x 4.4" x 4.2" | .372 | 44 | 29 lbs. |
| 2850G | 0 22315 31268 5 | 34.8" x 4.4" x 4.2" | .372 | 44 | 26.3 lbs. |
| 2845G | 0 22315 31267 8 | 34.8" x 4.4" x 4.2" | .372 | 44 | 21 lbs. |